



## Product Specification Report Key Attributes



# smartfoamer-pro

Product ID: SS-TW500N

Low pH Vehicle Wash

### Description


An Ultra Concentrated high-foaming liquid truck and trailer low pH presoak formulated to effectively brighten all metal surfaces (chrome, stainless, and aluminum), remove petroleum and hydrocarbon based contaminants from all vehicle surfaces in a single application. Performs well in both treated and hard water. Utilizing the newest innovation of "Safe Acid." Our safe synthetic acid functions like Hydrochloric Acid but without the immediate hazards of non-synthetic hydrochloric acids. Contains a blend of heavy-duty cleaning surfactants, patented corrosion inhibitor package, safe for all vehicle finishes. Can be used in full service and automatic Truck Wash systems, completely biodegradable and phosphate-free.

### Features

- Modified to Dramatically Reduce Dermal Sensitivity
- Reduced Odor

### Benefits

- Nearly Eliminated Fuming
- Anti-Corrosive

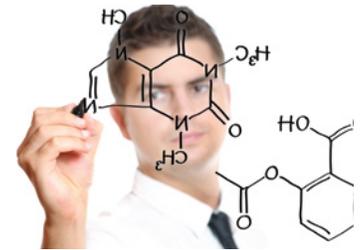

### Applications

An excellent, economical cement truck wash formulated for low, and high-pressure applications. Highly effective on chrome, glass and painted surfaces. Recommend to use air injection to boost foaming ability. Allow 30-45 seconds of dwell time. Recommended to be applied before high pH pre-soak in touchless applications. Must be removed with high-pressure water.

### Types of Operations

- Fleet Truck/Bus Washing Systems
- Truck Leasing Dealers
- Truck Washes
- Trian Washes

### Type of Equipment

- Touchless Drive-Thru and Gantry Machines
- Friction Drive-Thru and Gantry Machines
- Pressure Washer Systems
- Manual Bucket Wash

### Water Types

- Revers Osmosis Water
- Natural Water (city or well)
- Soft Water
- Structured Water

### Specifications

Physical Form . . . . . Liquid  
 Color . . . . . Amber  
 Odor . . . . . Mild  
 pH (Concentrate) . . .1 ~1.5  
 (1% solution) . . . . 2 ~ 3  
 Density - Specific Gravity . . . . .9.07 lbs. / gal. ~ 1.09  
 D.O.T. Shipping . . . . .UN 1760  
 Flash Point (TCC) . . . . . None  
 Shelf Life . . . . .1 year

### Dilutions

Application	Oz per gallon	Dilution
Pressure Washer	0.25	500:1
Touchless Gantry Rollover	1.02	125:1
Touchless Drive-Thru	1.02	125:1
Friction Gantry Rollover	0.50	260:1
Friction Drive-Thru	0.50	260:1

### Packaging

- Sizes**
- 5 Gallon Pail
  - 30 Gallon Drum
  - 55 Gallon Drum
  - 275 Gallon Tote

Smart Solutions Sales and Support  
[www.smartsolutions.net](http://www.smartsolutions.net)